

**SPECIFICATIONS<sup>a</sup>**

Mainframe	Quad-core Intel processor/16 GB RAM/Windows 10	
Interfaces	<ul style="list-style-type: none"> <li>› RJ45 LAN 10/100/1000 Mbit/s</li> <li>› USB 3.0 port</li> <li>› DVI and VGA video ports</li> </ul>	<ul style="list-style-type: none"> <li>› Serial RS-232 port</li> <li>› Headset and microphone ports</li> </ul>
Storage	256 GB SSD internal memory (flash)	
Power supply	AC input: ~ 100 V – 240 V; 50/60 Hz; 10 – 4.2 A	

**GENERAL SPECIFICATIONS**

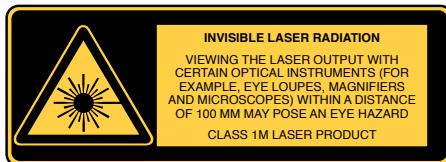
Size (H x W x D) <sup>b</sup>	154 mm × 459 mm × 558 mm (6 1/8 in x 18 1/8 in x 22 in)
Weight	15.5 Kg (34.2 lb)
Temperature	
Operating	0 °C to 40 °C (32 °F to 104 °F)
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Relative humidity	0 % to 80 % non-condensing

**ACCESSORIES**

GP-10-101	Ruggedized carrying case	GP-2257	Rackmount brackets (kit of two)
GP-130	GPIB cable (6 feet/2 meters)	GP-2258	USB to GPIB adapter
GP-2016	RJ45 LAN cable (10 feet)	GP-2259	Benchtop feet pads
GP-2256	FTBx module slot blank cover		

**Notes**

- a. All specifications valid at room temperature.  
b. Size only includes feet and not rackmount bracket.

**LASER SAFETY**

## ORDERING INFORMATION

## LTB-8-XX-XX-XX

**Additional Hard Drive**

00 = Without extra hard drive  
RHD = Raid extra hard drive

**Inspection Probe Base Tips<sup>a</sup>**

APC = Includes FIPT-400-U25MA and FIPT-400-SC-APC  
UPC = Includes FIPT-400-U25M and FIPT-400-FC-SC

**Inspection Probe Models**

00 = Without inspection probe

FP410B = Digital video inspection probe<sup>b</sup>  
Triple magnification

FP420B = Analysis digital video inspection probe<sup>b</sup>  
Automated pass/fail analysis  
Triple magnification  
Autocentering

FP430B = Automated analysis digital video inspection probe<sup>b</sup>  
Automated focus  
Automated pass/fail analysis  
Triple magnification  
Autocentering

Example: LTB-8-RHD-FP-420B-APC

**Notes**

- a. Available if inspection probe is selected. For more information concerning all available optional tips, please visit [EXFO.com/FIPTips](http://EXFO.com/FIPTips).  
b. Includes ConnectorMax2 software.

**EXFO Headquarters** > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | [info@EXFO.com](mailto:info@EXFO.com) | [www.EXFO.com](http://www.EXFO.com)

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to [www.EXFO.com/contact](http://www.EXFO.com/contact).

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit [www.EXFO.com/recycle](http://www.EXFO.com/recycle). **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to [www.EXFO.com/specs](http://www.EXFO.com/specs).

In case of discrepancy, the web version takes precedence over any printed literature.