


# TO-Can




## Series



**5.6mm**




**9mm**




**9mm Tall**

Sheumann's T Series TO-Can packages bring you high-power, continuous-wave, single-mode and multimode options on industry standard submounts. Packages are hermetically sealed with AR coated windows and optional photodiode. Sheumann's proprietary laser chip design offers unrivaled quality and long lifetime. Wavelength emission range 780-1070nm with narrow tolerance options.




# T0-Can PACKAGES

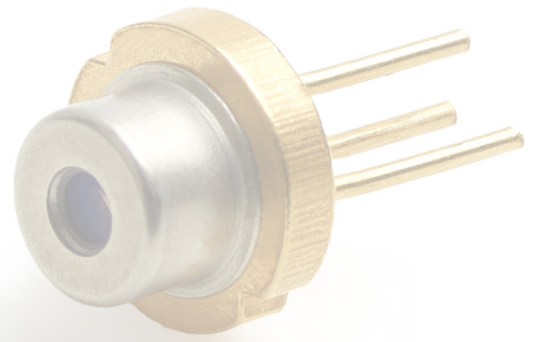


## Wavelength emission range 780-1070nm

### 5.6mm



CATEGORY	SPECIFICATIONS
Dimensions (Length x Diameter)	10mm x 5.6mm
Single-mode Power	50mW - 80mW
Multimode Power	200mW - 500mW
Wavelength Tolerance	+/- 3,5,10 options
Photodiode	Optional common anode (+) or cathode (-)
Cap	Taped/loose, or welded
Chip Mount	p-up or p-down (Single-mode only)

### 9mm



CATEGORY	SPECIFICATIONS
Dimensions (Length x Diameter)	11.5mm x 9mm
Single-mode Power	50mW - 300mW
Multimode Power	50mW - 500mW
Wavelength Tolerance	+/- 3,5,10 options
Photodiode	Optional common anode (+) or cathode (-)
Cap	Taped/loose, or welded
Chip Mount	p-up or p-down (Single-mode only)
Fast Axis Microlensing	Optional, square beam or collimated <2%

### 9mm Tall



CATEGORY	SPECIFICATIONS
Dimensions (Length x Diameter)	9mm x
Single-mode Power	up to 600mW
Multimode Power	up to 3W
Wavelength Tolerance	+/- 3,5,10 options
Photodiode	Optional common anode (+) or cathode (-)
Cap	Taped/loose, or welded
Chip Mount	p-up or p-down (Single-mode only)
Fast Axis Microlensing	Optional, square beam or collimated <2%