

Data sheet microchip laser MCL-1064-150

Microchip pulse laser module with emission wavelength 1064 nm
(Data sheet rev. 2.0, 2020-05-14)

Table of contents:

1 Microchip laser description.....	1
2 MCL-1064 applications.....	1
3 Microchip laser parameters.....	2
4 Dimension and Weight.....	5
5 Included Accessories.....	5

1 Microchip laser description

The Microchip Laser module delivers short single mode pulses on demand at a wavelength of 1064 nm. The pulse repetition rate is software controlled and can be set between single shot and 500 kHz. The pulse duration is in the range of 150 ps.

The MCL-1064 contains a Q-switched microchip with pump diode and a software controlled electronic module. The microchip consist of a Nd:YVO₄ laser crystal with a saturable output coupler.

The MCL-1064 can be used

- In combination with a LabVIEW based driver for custom access via USB port
- In stand alone mode at fixed pulse rate without additional software control
- With an external clock.



2 MCL-1064 applications

Possible applications of the MCL-1064-150 can be


- Micromachining
- Light detection and ranging (LIDAR)
- Precision measurements
- Frequency conversion.



3 Microchip laser parameters

Parameter (@200 kHz)	minimum	typical	maximum	unit
Laser emission wavelength	1063.8	1064.0	1064.2	nm
Spectral width		13		pm
Spectral shift		13		pm/100 kHz
Beam divergence	30	40	50	mrad
Beam waist diameter	28	32		μm
Beam Waist at Aperture	1.0	1.2	1.4	mm
M^2		1.3		
Pulse energy	12.5	15		nJ
output power	2.5	3.0		mW
Pulse duration	120	150	180	ps
Repetition rate	Single shot		500	kHz
Polarization		linear		
Timing jitter		1.8	3.0	ns


Other Features

- Synchronization to external clock or pulse on demand
- Stand alone mode at fixed pulse rate without software control
- A Laptop or PC with Win 7 or higher, one USB port and LabVIEW drivers is required for full operation mode

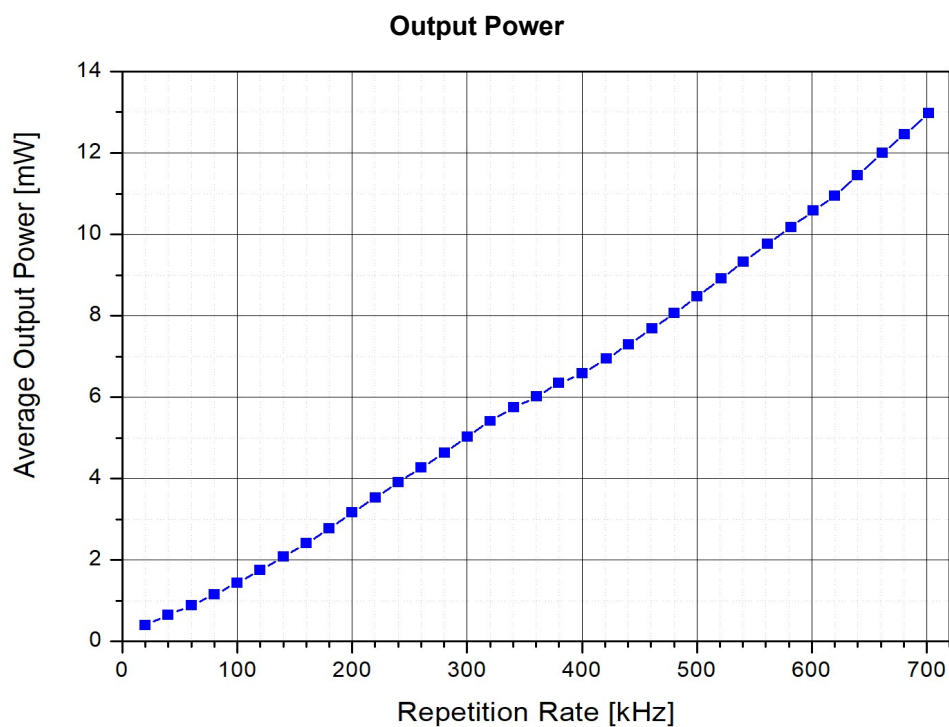


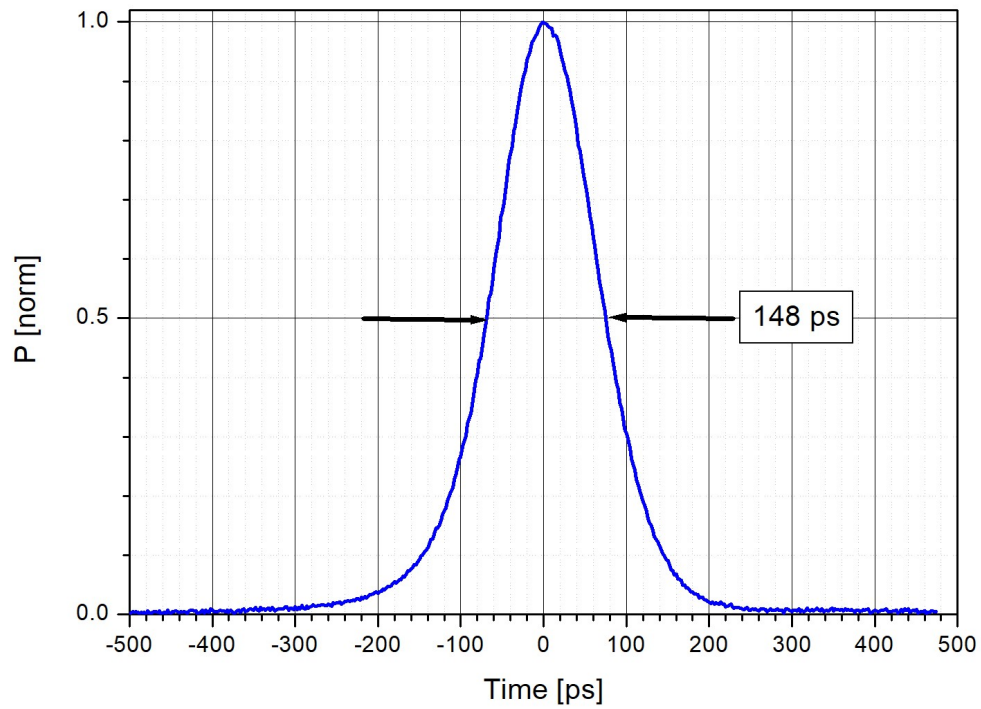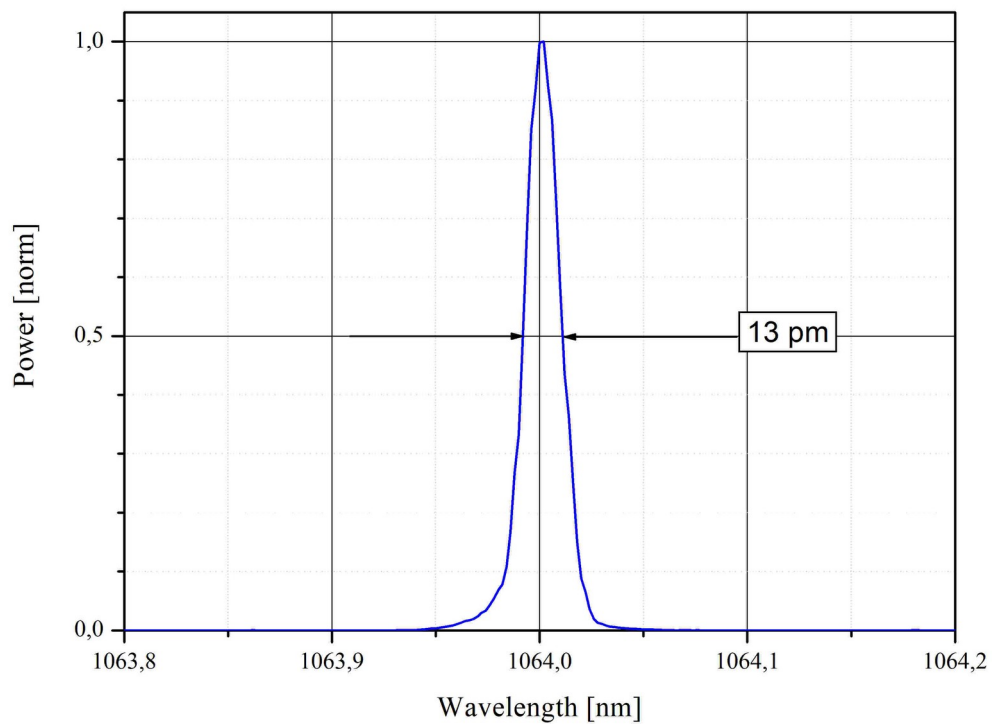Pulse Duration**Pulse Spectrum**

Beam divergence

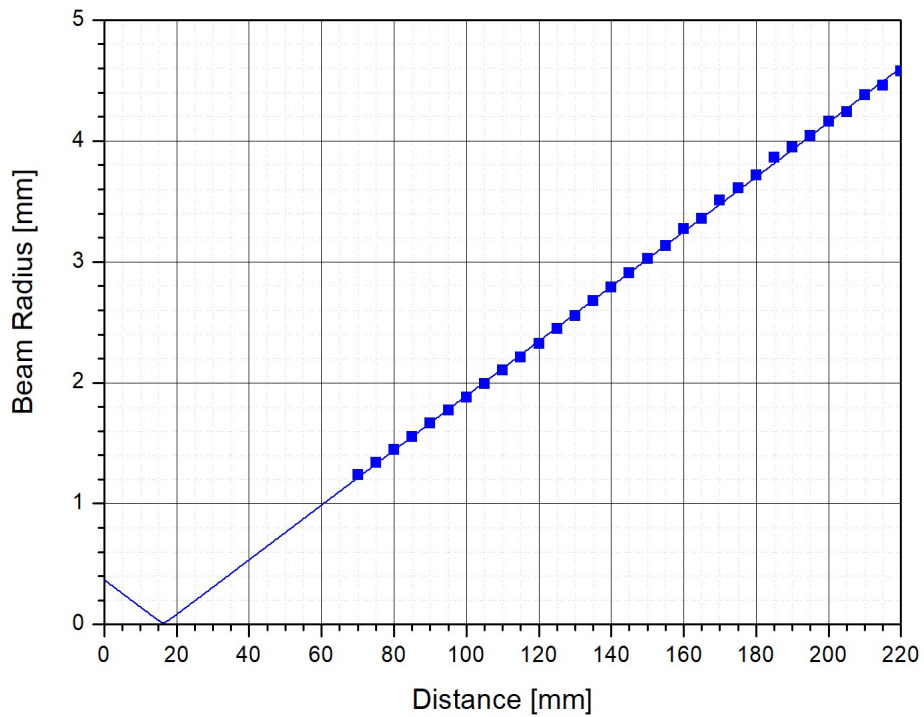


Timing Jitter Histogram

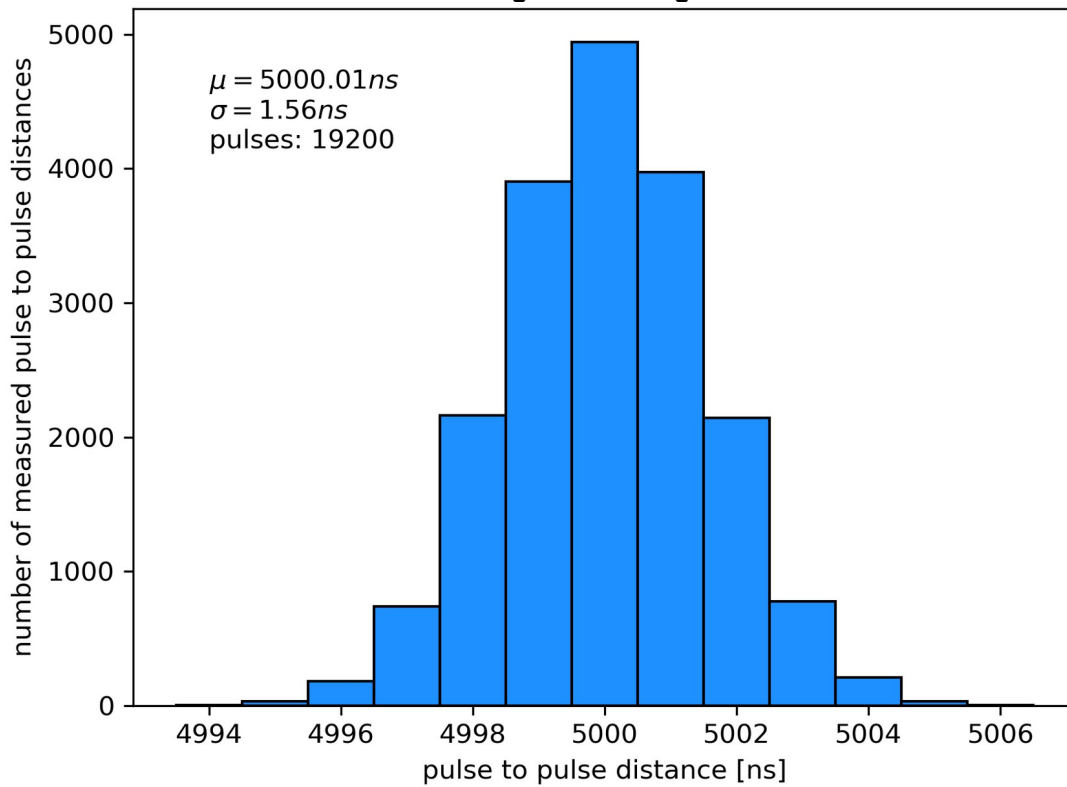

4 Dimension and Weight

Dimension:

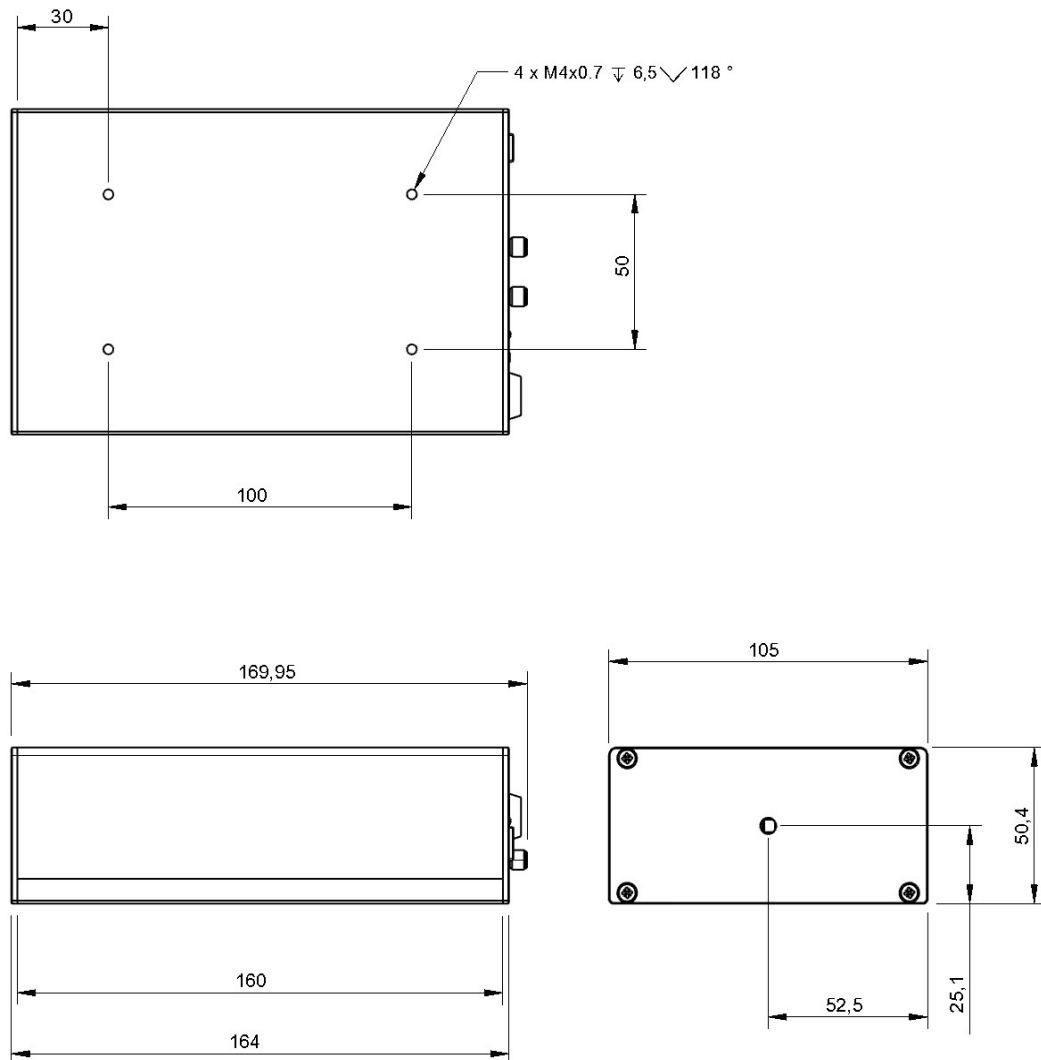

Weight: 870 g (without external Power supply)

5 Included Accessories

- external power supply, 110 – 230 V, output 60W
- USB-cable
- Key
- User manual
- Control software

